


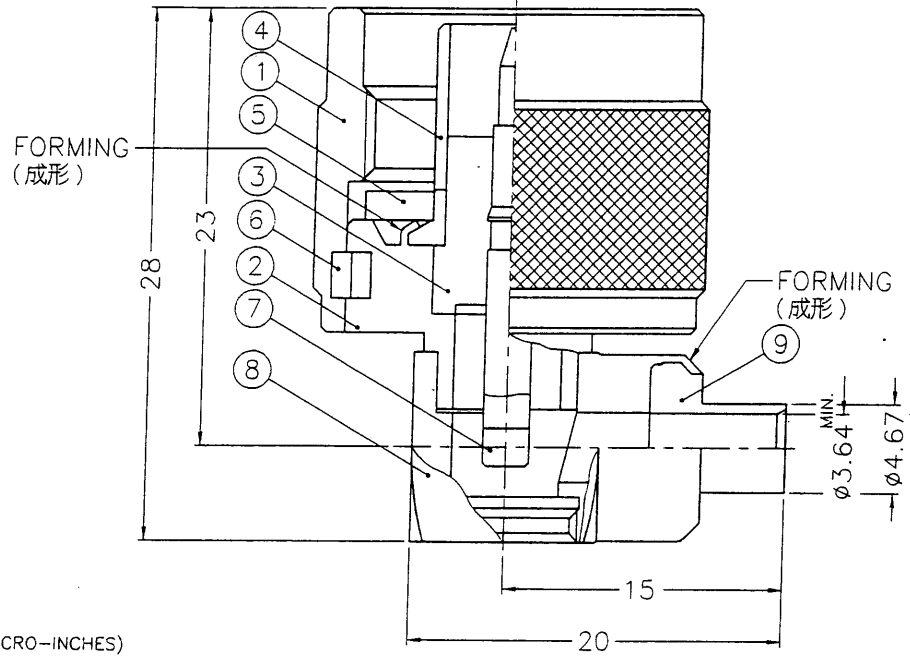


REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
A1	B-2	NOTE 2 WAS NOTE 3\N/A\08-05-00'



RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)  
 1. BRASS PER QQ-B-626  
 2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 4. TEFLON MIL-P-19468



10	NUT	NOTE 1	NOTE 2	1	15687061606-5
9	BARREL	NOTE 1	NOTE 3	1	N1182A2-9-467 /364
8	HOUSING	NOTE 1	NOTE 2	1	N1182A2-8-37
7	CONTACT PIN	NOTE 1	NOTE 3	1	N1112A2-7
6	RETAINER RING	SUS 304	NATURAL	1	N5000-7-C
5	GASKET	SILICONE	RED	1	GS-156/8X15
4	CONTACT BODY	NOTE 1	NOTE 2	1	N5000-5
3	INSULATOR	NOTE 4	NATURAL	1	N1112A2-3
2	BODY	NOTE 1	NOTE 2	1	N1112B1-2
1	SHELL	NOTE 1	NOTE 2	1	N5000-1-B
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS  
 UNLESS OTHERWISE SPECIFIED TOLERANCES  
 0.5-6 = ±0.2  
 6-30 = ±0.4  
 30-120 = ±0.6  
 120-315 = ±1  
 315-1000 = ±1.6  
 1000-2000 = ±2.4

PART NO.	
APPROVED	DATE 08-05-00'
CHECKED	DATE 08-05-00'
DRAWN	DATE 08-05-00'

Amphenol - Kal Jack	
TAINAN TAIWAN	
TITLE	N R/A DIRECT SOLDER PLUG
DRAWING NO.	KJ-N1182A2-N/3GT3G-.141-50
FILE NO.	F:\DWG\N\1182A2\141-50\N3GT3G



*Handwritten signatures:*  
 Approved: *Jack C*  
 Checked: *Jackey*  
 Drawn: *Jackey*

F  
E  
D  
C  
B  
A

F  
E  
I  
C  
E  
A